

XLED interchangeable probes



- High Resolution CMOS image sensor
- Integrated objective lens
- Fixed Focus
- Integrated LED illumination
- Temperature resistant up to 140° C (up to 5 mins)
- Multi-layer tungsten braid on PU jacket
- Multiple diameter & working length options:


Diameter	3.0mm	4.0mm	6.0mm
Working Length	1.0 to 2.0m	1.0 to 2.0m	1.5 to 7.5m
Articulation	2-Way	2-Way	4-Way
Side View Options	Option of fwd or side view probe		Side view tip adapter




iCapture DVR

- 5" TFT LCD Colour Display
- 640 x 480 (VGA)
- Built-in text overlay
- SDHC card storage (up to 32 GB)
- Composite video-out (BNC)
- Rechargeable Li-ion battery or direct power

Deployment Options:

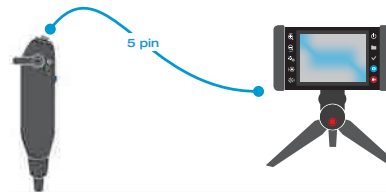

Option A: xLED probe to iCapture

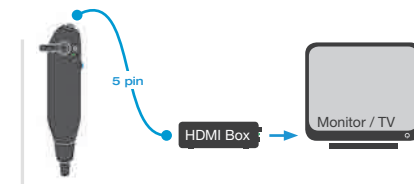

Option B: xLED probe to Monitor/TV

www.viscoy.com